

Electromechanical operator for sliding gates




- Range of residential operators, extremely simple to install and completely safe to use thanks to full compliance with the current European standards.



Technical Features

| | |
|------------------------|--------------------------|
| U-Link | No |
| Control Unit | ALPHA |
| Board Power Supply | 230V |
| Motor Power Supply | 230V |
| Power Input | 270W |
| Leaf Weight | 500 kg |
| Leaf Speed | 8.5 m/min |
| Type of Limit Switch | Electromechanical |
| Pinion Module | 4 |
| Slowdown | No |
| Locking | Mechanical |
| Release | Knob with Triangular Key |
| Frequency of Use | Semi Intensive |
| Environment Conditions | from -15 °C to 60 °C |
| Protection Rating | IP24 |
| Actuator Weight | 11 kg |
| Impact Reaction | Mechanical Clutch |

Dimensions

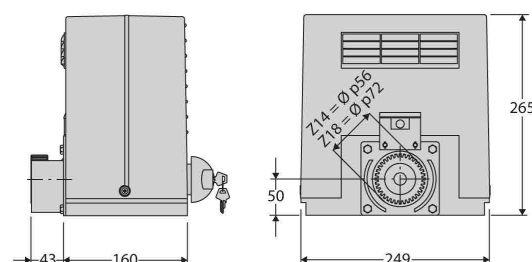

Control Panel



* Design and specifications are subject to change without notice

Accessories



RADIUS B LTA 230 R2
Flashing Light



MITTO B RCB02 R3
Transmitter 2 Channel



ERIS A30
Wireless Photocell



B EBA Blue Entry Android 4
Blue-Tooth Module